

TEXSPRAY T-MAX[™] <u>Electric Airless & Air-Assisted Texture Sprayers</u>



OWN YOUR WALL WITH GRACO


VERSATILITY From spray plasters up to aggregates, T-MAX delivers

MODULARITY TO ITS FULLEST Designed for optimized transport to and from as well as on the jobsite

EASY ACCESS PUMP No-Tools pump design allows for easy pump access and cleaning

Texture Applications T-MAX[™] 506 – T-MAX[™] 657 – T-MAX[™] 6912

T-MAX Electric Texture Sprayers Airless or Air-Assisted T-MAX delivered Airless or Air-Assisted, T-MAX delivers!

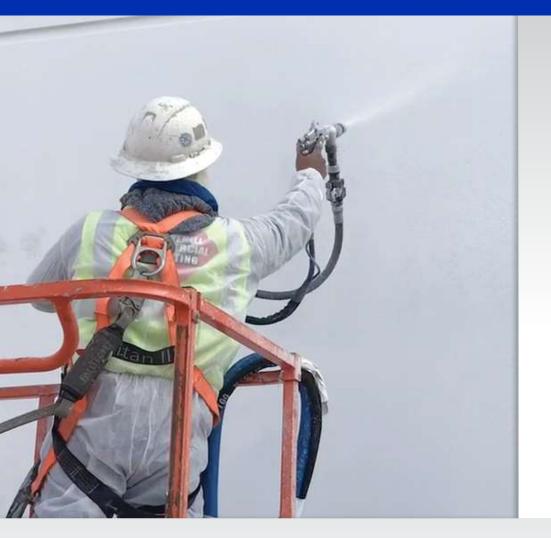

The easiest way to spray texture

Graco's TEXSPRAY T-MAX electric texture sprayers provides you efficiency and performance needed for plaster or texture jobsites whilst improving flexibility and versatility whenever you need it.

A modular design tuned for 1-person handling and supported by a multitude of hose solutions and applicators, T-Max will be able to provide you with all the tools needed for a professional finish.

Sprays the Widest Range of Texture Materials

Knockdown*



(Popcorn)

Orange Peel*, Fine Splatter*



Textured Acrylics* Flastometrics'




Mortar*, EIFS Basecoat & Adhesives'

Skim Coats (Airless)

*Separate air compressor required. Requires minimum 20 SCFM air compressor.

TIP!

When pumping extremely coarse materials, heavier aggregates have a tendency to build up on the interior surface of a hose. This can limit both the flow and dispersion of the material. When spraying these materials, it may be worth considering pre-lubricating your machine's pump and hose. This reduces friction and enables the aggregates to slide more smoothly across the hose.



+ More!




Modularity

Graco's finest in modular designs

Modularity from your doorstep to a multitude of simultaneous jobsites, up and down floors, all the way to the heart of the pump on the jobsite.

Graco's brand new T-MAX provides you with an unseen modular and versatile design without any need for tools.

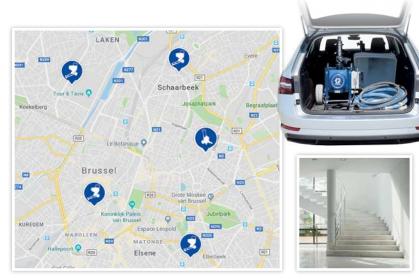

Hoses and Applicators

- Flexible hose sets available in various lengths with quick connecting CamLock[™]
- Choose between Inline Lance for Airless application, or STX and Pole applicators for Air-Assisted

Material Supply

Wether you have a Graco T-MAX hopper or an external material container, the modularity of T-MAX offers you connectivity to various systems.





2" CAM Foot Valve for 2" connection to container



Job Site Logistics

Relocating your unit or moving up and down floors has never been easier. Simply disconnect your pump from your material hopper and move them individually.



Split Pump-Hopper Design

- 1. Loosen pump locking pin
- 2. Open hopper clamp
- 3. Slide pump away from hopper



Quick-Access Piston Pump

T-MAX pumps are designed to be taken apart in seconds, allowing access to any part of the pump. Most importantly, no tools are required!

- Cleaning of pump
- Replacement of inlet ball
- Removal of piston spring for aggregate spraying on T-MAX 6912







TexSpray T-Max 506 & 657

The First Choice for Interior Plasters and Decorative Materials

TEXSPRAY T-MAX[™] 506 and TEXSPRAY T-MAX 657 have been specifically designed to apply most interior plasters and fillers.

Using the T-MAX 506 or 657 in combination with an external compressor and an air-assisted applicator allows you to spray decorative plasters with aggregates up to 1mm.







Small, Compact, and Maneuverable

- Balanced design for easy rolling even when full
- Locking front swivel caster wheel

Material Hoppers

- 65 or 95 litre hoppers
- Steep-sided design keeps material flowing
- Option to install Graco's Vibra-Flo system
- Option to install Graco's Bagrollers

Heavy-Duty Modular Frame

- Steel construction withstands jobsite abuse
- Easy, no-tools connect and disconnect
- Small, compact and balanced design for easy maneuvering



GRACO

Tool Box

- Built-In Storage compartment
- · Keep your nozzles, tips and other tools safe





Material Scraper

Straight and curved edge allowing hopper cleaning as well as emptying material bucket fully



TexSpray T-Max 6912

One Machine for nearly every Texture Application

TEXSPRAY T-MAX 6912, the newest, easiest way to spray smooth and aggregate materials on exterior and interior texture jobs. From textured acrylics, synthetic stucco, EIFS, acoustics, joint compound and more.

Easily apply spray plasters without a compressor or switch to air-assisted mode to spray decorative finishes and heavy aggregates up to 2 mm.







SmartControl[™] 3.0

- Delivers smooth, consistent material flow
- Provides Airless or flow mode
- LED display shows pressure, litres, and more







Flow / Pressure Control

TEXSPRAY T-MAX 6912 comes with a 3-position switch allowing you to choose between Airless, Air-Assist with Shut-Off and a Cleaning position.

- **UP** = Pressure Control for Airless
- **MIDDLE** = Flow Control for Air-Assist with external signal cable control
- **DOWN** = Flow Control without external signal cable, ideal for priming and cleaning

Choose Flow Control for Aggregate Holding Materials Pump keeps working to maintain set rpm of motor. If rpm is achieved, it will keep pumping at this rpm.

Choose Pressure Control for Airless Plasters

Pump keeps working to maintain set pressure. If pressure is achieved, pump will stop working untill pressure drops (spray is initiated)





Oversized Passages for Maximum Productivity

- Optimized pump design for smooth flow of material
- Oversized piston cage for flow of material and
 aggregate, even allowing easy no-tool spring removal

230V MaxPower[™] DC Motor

- Use with standard 16/20 Amp circuits
- No-maintenance, brushless design
- Heavy Duty Drivetrain

Air Hose and Signal Cable Management

Built-In Air Manifold with EURO air couplers provides fixed air connection to frame relieving strain on signal cable when pulling on air line.



TexSpray T-Max Applicators

The Applicator that best fits your needs

Your applicator is as important as your pump, if not even more. Choose the applicator that best fits your needs. Within the segments of Airless or Air-Assist, Graco offers a variety of applicators.





STX Gun

Sequence texture gun for less pack-outs

Starts and stops the pump for you - all you need to do is operate the trigger.

- Provides soft-start operation that eliminate material bursts
- Built-in sensor detects tripper being pulled or released
- Built-in detent allows flow of material and air even when pump is shut-off
- · Closes completely when detent is operated



T-MAX Lance

Inline^m design applicator with spool valve to open and close. Can be used for Airless as well as Air-Assisted applications.



Inline Gun

Combines the benefits of a normal spray gun with inline material flow. For Airless applications only.



GRACO

FreeFlo[™] Inline Gun

Inline design applicator without valve. Ideal for larger aggregates thanks to its large passage. Can be used for Airless as well, ideally with an external ball-valve.

Rigid and Flexhead Pole Guns

Supported by a large variety of spray discs, Graco's pole guns allow you to spray a multitude of materials for air-assist applications. the rigid version functions as an extension with it's 1m length while the flexhead allows for usage in tight spaces.



Remote Switch for Pump Shut-Off

Even if you don't have an STX gun with your T-Max 6912, the ability to shut off the pump remotely can still be achieved with our remote switch kits.

Available in 2 lengths and extendable, use it with your choice of applicator. Simply connect to your hose close to the applicator and start/stop the pump when required.

GRACO'S FINE FINISH KIT FOR TEXTURE

Experience the difference with graco's Fine Finish kit. This kit transforms the round spray pattern into a controlled spray fan.

A round spray pattern is typical when spraying decorative material with a compressor and an air nozzle: it's difficult to control and not easy to get a an even finish.

Available for all applicators with air-assist functionality:

- STX Gun
- T-MAX Lance
- FreeFlo[™] Inline Gun
- Rigid and Flexhead Pole Guns



TexSpray T-Max Accessories

Get the most out of your equipment by using our professional accessories:



T-Max p	T-Max pump modules		
17Z169	T-Max 506, 230v eu		
17Z291	T z-Max 506, 230v it, dk, ch		
17Z170	T-Max 506, 110v uk		
17Z171	T-Max 657, 230v eu		
17Z292	T-Max 657, 230v it, dk, ch		
17Z172	T-Max 657, 110v uk		
17Z173	T-Max 6912, 230v eu		
17Z293	T-Max 6912, 230v it, dk, ch		
17Z174	T-Max 6912, 110v uk		

T-Max pump modules

17Y905	Prime valve kit, 1" CAM quick connect
19A843	2" CAM foot valve (T-Max 6912)
25E693	200 liter suction tube kit (T-Max 6912),
	2" CAM quick connect, includes 19A843
25E692	20 liter suction tube kit, (T-Max 506/657/6912),
	Rubber quick connect
25D091	2" CAM container suction kit, 2" Female
	CAM quick connects x 0,6m hose

T-Max hopper modules

17Z182	4-bag T-Max hopper (65 liter)	
17Z183	6-bag T-Max hopper (95 liter)	

Hopper accessories

Material hoses

Q

289959	3/4" x 3m whip hose
289960	1" x 5m hose
289961	1" x 10m hose
17Z187	1" x 15m hose
17Z188	1" x 30m hose

Air hoses

17Z303	Air hose, 3/8" x 13m
17Z304	Air hose, 3/8" x 18m
17Z305	Air hose, 3/8" x 33m

Remote switch kits

17Z157	Remote switch, 18m
17Z158	Remote switch, 33m
15Y525	Extension cable remote, 15m

Air + STX remote wire kits

Air hose + STX remote wire, 13m
Air hose + STX remote wire, 18m
Air hose + STX remote wire, 33m

Air connectors

114558	Female air coupler, 1/4" npt(f)
169967	Male air coupler, 1/4" npt(f)

CAM connectors 15

15T116	1" CAM (m) x 1" npt(f), aluminium
289874	1" CAM (f) x 1" npt(f), aluminium
120307	2" CAM (m) x 1-1/2" npt(f), aluminium
513549	2" CAM (m) x 1-1/2" npt(f), aluminium
120308	2" CAM (f) x 1-1/2" npt(f), aluminium
15U007	1" CAM (m) x 1" CAM (m) plug, aluminium
17Z307	1" CAM (f) plug, aluminium
17V096	2" CAM (m) plug, aluminium
17V095	2" CAM (f) plug, aluminium





T-Max applicators

17Y910	STX air assist texture trigger gun '
17Z128	FreeFlo inline gun *
24B944	Rigid pole gun 1m *
24B945	Flex head pole gun *
17Z054	T-Max lance with airless tips
17Y907	Inline gun, RAC X, HDA651
24C414	Ball valve kit, FreeFlo & pole guns

STX gun air nozzles

17Z563	4mm stainless steel
17Z564	6mm stainless steel
17Z565	8mm stainless steel
17Z566	10mm stainless steel
17Z567	12mm stainless steel

Pole gun air nozzles

16A443	3/16" stainless steel (4,75mm)
16A444	1/4" stainless steel (6,35mm)
16A445	5/16" stainless steel (8mm)
16A446	3/8" stainless steel (9,5mm)
16A447	7/16" stainless steel (11mm)
16A448	1/2" stainless steel (12,7mm)
16A449	9/16" stainless steel (14,3mm)
128459	3/8" Nickel plated stamped steel (9,5mm)
128460	1/2" Nickel plated stamped steel (12,7)
128461	9/16" Nickel plated stamped steel (14,3mm)
128462	5/8" Nickel plated stamped steel (15,9mm)
128463	11/16" Nickel plated stamped steel (17,5mm)
128464	3/4" Nickel plated stamped steel (19mm)

T-Max lance & free flo accessories

172185	Air-assist kit for lance, (15m air hose, air-assist nozzles)*
248888	3mm round nozzle
248524	4mm round nozzle
248525	6mm round nozzle
248526	8mm round nozzle
248527	10mm round nozzle
289922	18 Mesh filter with filter scraper (qty 2)
289923	30 Mesh filter with filter scraper (qty 2)
15X791	Filterless tube, air plug
277789	Filter scraper

Fine Finish parts

17Z635	STX FF kit (hardened discs, adapter)
18A155	Lance/FreeFlo FF kit (hardened discs, adapter)

WideTex FineFinish Discs	Standard	Hardened
W4	24S099	24S114
W6	24S100	24S115
W8	24S101	24S116
W10	24S102	24S117
W12	24S103	24S118
WXL	24S104	24S119

Miscelaneous

2

2

17Z231	Rubber inlet ball (T-Max 6912) (qty 1)
17Z232	Rubber inlet ball (T-Max 6912) (qty 5)
17Z556	Steel ball kit, inlet + outlet (T-Max 6912)
17Z648	Ceramic ball kit, inlet + outlet (T-Max 6912)
17Z640	Si-N ball kit, inlet + outlet (T-Max 6912)
248395	Air nozzle cleaner
15U027	Air hose connection
17Z224	Hose lubricant (qty 50)
248515	Sponge ball 1.2" cleanout kit (qty 5)
19A983	Sponge ball 1" cleanout kit (qty 5)







T

TEXSPRAY T-MAX[™]



Technical Specifications

All units ship complete and ready to spray:

Model Name:	T-MAX AIRLESS			T-MAX AIR-ASSIST		T-MAX Airless / Air-Assist	
	506	657	6912	6912	6912	6912	6912
SPECIFICATIONS							
Part Numbers: EU - 230V	17X980	17X983	17X986	17X990	17X993	17Z285	17Z288
Part Numbers: IT, DK, CH - 230V	17X981	17X984	17X987	17X991	17X994	17Z286	17Z289
Part Numbers: UK - 110V	17X982	17X985	17X988	17X992	17Z282	17Z287	17Z290
Max. Tip Size	Plaster 0.051"	Plaster 0.061"	Plaster 0.071"	Plaster 0.071"	Plaster 0.071"	Plaster 0.071"	Plaster 0.071"
Max. Flow - I/min (gpm)	6.4 (1.7)	7.2 (1.9)	12 (3.17)	12 (3.17)	12 (3.17)	12 (3.17)	12 (3.17)
Max. Pressure - bar (PSI)	50 (730)	65 (940)	69 (1000)	69 (1000)	69 (1000)	69 (1000)	69 (1000)
Motor rating - kW (HP)	0.9 (1.2)	0.9 (1.2)	2 (2.8)	2 (2.8)	2 (2.8)	2 (2.8)	2 (2.8)
Compressor I/min	External Compressor	External Compressor	External Compressor	External Compressor	External Compressor	External Compressor	External Compressor
Weight - kg (lbs)	71 (156)	73 (160)	86 (190)	86 (190)	86 (190)	86 (190)	86 (190)
FEATURES							
SmartControl	<i>√</i>	1	1	1	1	1	1
LED Display			1	1	1	1	1
Flow / Pressure Selector	Integrated	Integrated	1	1	1	1	1
Pump Shut-off at gun			Optional	Remote Switch	Built in to STX gun	Remote Switch	Built in to STX gun
Hopper	4 bags	6 bags	6 bags	6 bags	6 bags	6 bags	6 bags
Endurance Pump	1	1	1	1	1	1	\checkmark
Piston Packing	Single Packing	Single Packing	V-Packing	V-Packing	V-Packing	V-Packing	V-Packing
Modular Split Frame	\checkmark	1	1	1	1	1	1
Bag Roller	Optional	Optional	Optional	Optional	Optional	Optional	Optional
Vibra-Flo Shaker	Optional	Optional	Optional	Optional	Optional	Optional	Optional
COMPOSITION							
Tips	HDA651	HDA651 -	+ HDA655			HDA651	+ HDA655
WideTex Tips				W4H, W6H, W12H	W8H, W10H, , WXLH		W8H, W10H, , WXLH
Nozzles				4mm, 6mm, 8mm, 10mm	4mm, 6mm, 8mm, 10mm, 12mm	4mm, 6mm, 8mm, 10mm	4mm, 6mm, 8mm, 10mm, 12mm
Guard		RAC X - 246215				RAC X -	246215
		-MAX Lance - 17Z054		Free Flo - 17Z128	STX - 17Y910	T-MAX Lance - 17Z054 Free Flo - 17Z128	T-MAX Lance - 17Z054 STX - 17Y910
Hose	1" x 5m - 289960	1" x 10m - 289961	1" x 5m - 289960 1" x 10m - 289961		- 289960 - 289961		- 289960
Whip hose		3/4" x 3m - 289959		3/4" x 3m - 289959		3/4" x 3m - 289959	
Toolbox		\checkmark		1		1	
Tools	Scraper	Scraper	Scraper	Scraper	Scraper	Scraper	Scraper

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Graco is certified ISO 9001.

GRACO DISTRIBUTION BVBA Industrieterrein Oude Bunders • Slakweidestraat 31 • B-3630 Maasmechelen Tel: +32 (89) 770 700 • Fax: +32 (89) 770 777 • http://www.graco.com





©2019 Graco Distribution BVBA 320596ENEU (rev.B) 06/19 Printed in Europe. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. For more information on Graco's intellectual property, see www.graco.com/patent or www.graco.com/trademarks.